




PRODUCT SPECIFICATIONS

THERMAL BLANKETS FOR CAT 793C (3516)



**EXHAUST
TECH SHEET
AVAILABLE**

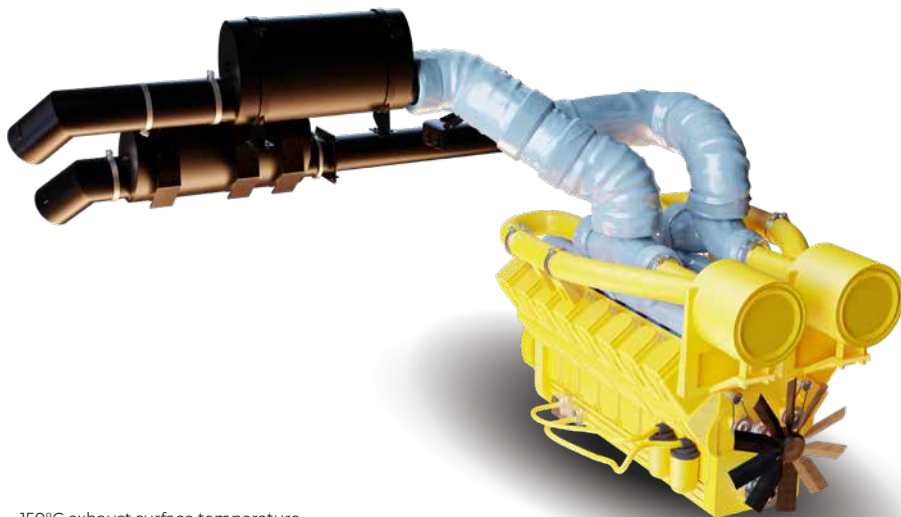

150°C exhaust surface temperature compliant (NSW MDG 15 Guideline)



Tailor-made for a snug fit



Non-itch silica insulation



Quick-fit springs



Essential for fire mitigation



Australian made

THERMAL BLANKETS FOR CAT 793C

Aletek's thermal blankets reduce the surface temperature of engine components to reduce the risk of fire. Our blankets for Cat 793C are tailor-made to reduce the risk of burns and mitigate engine fires.

- Essential for fire mitigation on Cat mining equipment
- Worker safety and protection of your investment in people
- Less engine fires, site shutdowns and insurance premiums
- Quick-fit springs are pre-fitted for faster installs and perfect tension
- Lobster-back design for superior fitment on pipe bend sections
- Designed from 3D scans



Thermal blankets are integral for effective fire mitigation in engine bays



Decrease outer surface temperatures for reduced fire risk and ignition hazards



Faster and easier installs backed by superior product design



GLOBAL HEAD QUARTERS
 Queensland, Australia
 T 1300 886 628
 sales@aletek.com.au
 www.aletek.com.au

AUSTRALIA
 New South Wales
 Queensland
 Victoria
 Western Australia

USA
 Arizona
 California
 Utah

STH AMERICA
 Chile
 Colombia
 Peru


INDONESIA
 Kalimantan



PRODUCT SPECIFICATIONS

THERMAL BLANKETS FOR CAT 793C (3516)

THERMAL BLANKET COMPONENTS

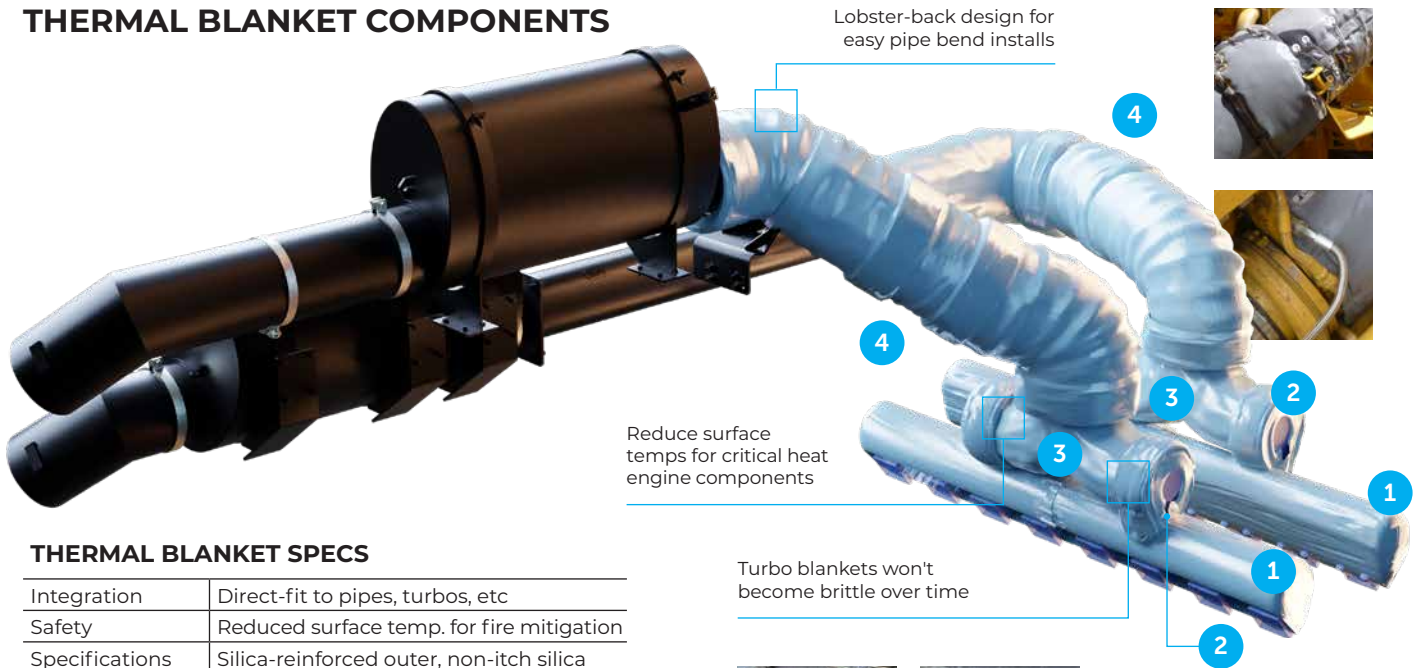

THERMAL BLANKET SPECS

Integration	Direct-fit to pipes, turbos, etc
Safety	Reduced surface temp. for fire mitigation
Specifications	Silica-reinforced outer, non-itch silica insulation, silica cloth inner with s/steel mesh (Hexavalent Chromium free)
Design Features	Quick-fit springs, snug fit, fast installs
Part No.	110-414 (Complete Kit)
Aletek Drawing	ALE-3494 (ATY 202-UP)

Turbo blankets won't become brittle over time



1 MANIFOLD BLANKETS

Design Features	Manifold to turbo collar removes gaps
Safety	Heat insulation and lower surface temps
Part No.	123-963 (Group)



2 TURBO BLANKETS

Design Features	Sewn collars (turbo to engine pipe)
Safety	Place oil line outside turbo blanket
Part No.	188-904 (Group)



3 JUNCTION BLANKETS

Design Features	Reinforced edge for bracket-holes
Safety	Tailor-made for minimal gaps
Part No.	138-635 (Group)



4 ENGINE PIPE BLANKETS

Design Features	Quick-fit springs for install and removal
Safety	Fish scale design so liquids/fluid/debris can run off
Part No.	137-719 (Group)

DIRECT-FIT EXHAUSTS AVAILABLE



EXHAUSTS TECH SHEET AVAILABLE

EXHAUST PARTS FOR 793C

Integration	Direct-fit replacement
Specifications	2mm steel, powder-coated finish
Compatibility	Interchange with OEM
Muffler P/N	1A 266-569
Engine Pipe P/N	2A 290-199 2B 281-402 2C 295-746 2D 260-780 2E 223-920 2F 228-688 2G 222-643
Install Hardware	See drawing ALE-169

*Note: Exhausts supplied in black